

ED3401A

Technical Specification


一. Application

It is a 34mm compression driver, which can be applied to professional performance speakers.


二. Technical Specification

- | | |
|---|--|
| (1). Throat Diameter : 25mm(1 inch) | (7). Fo : 1.1k ± 110Hz |
| (2). DC Impedance : $5.8 \pm 0.29 \Omega$ | (8). Frequency Response : 1.1kHz-18KHz |
| (3). Rated Impedance : 8Ω | (9). Voice Coil Diameter : 34.4mm |
| (4). Min Impedance : 6.4Ω | (10). Voice Coil Material : copper-clad aluminum flat wire |
| (5). Power Capacity : | (11). Voice Coil Bobbin Material : Kapton |
| Rated Power : 20W | (12).Voice coil roll: 2mm |
| Max Short-term Power : 80W | (13). Magnet Gap Depth : 2.4mm |
| (6). Sensitivity (1W/1m): 103±2dB | (14). Magnetic gap flux density : 1.3T |
| | (15). Net Weight : 1.34kg |

三. External view

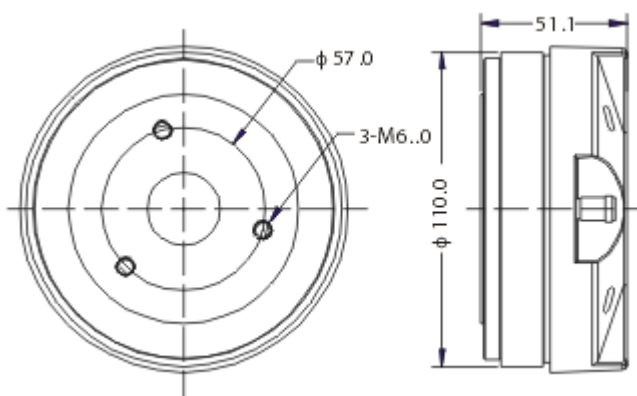

Frequency response curve (note: test with horn 4-HJ-02)

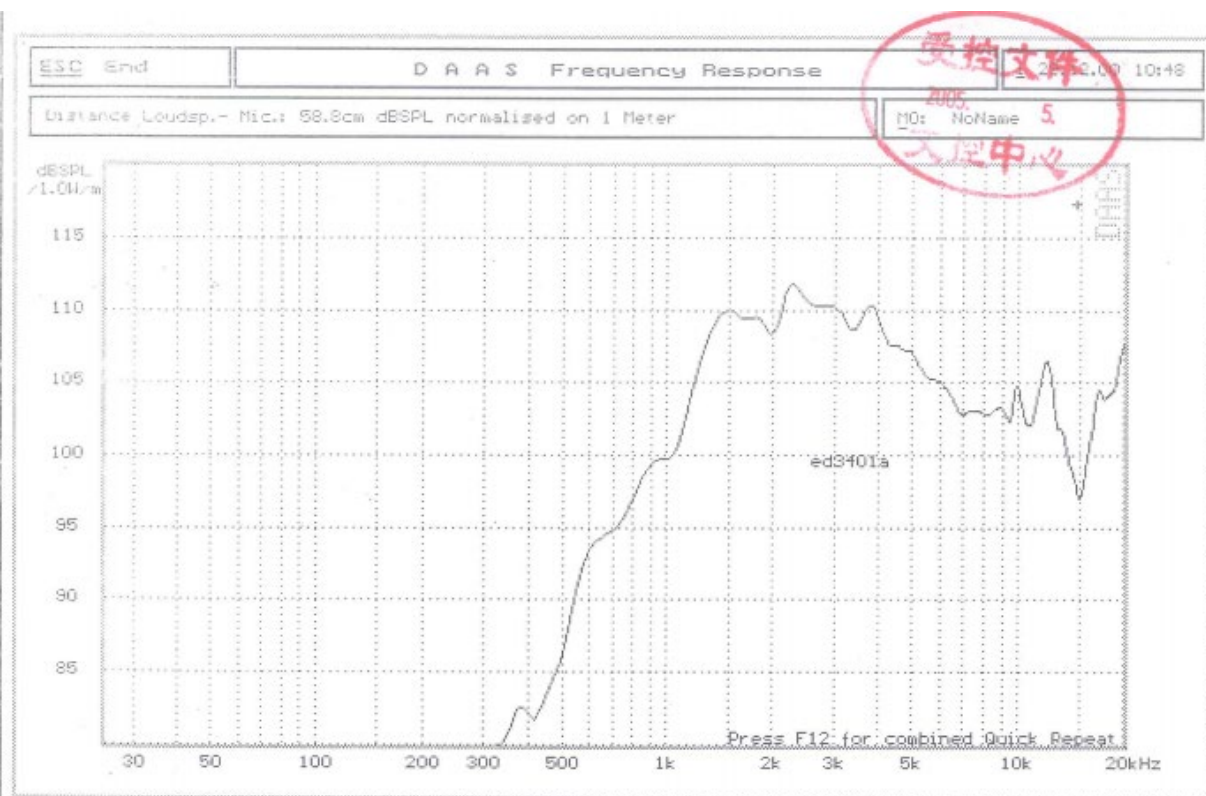

Impedance curve

